

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6733 Myers Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Screw-in RTD temperature probe with plug connector according to DIN EN 175301

- For temperatures between -50 to +260 °C
- Vibration-resistant construction
- The plug connection is locked to ensure contact, protection type IP65
- Available with transmitter
- DNV GL approval for basic types 902044/20 and 902044/21 (max. insertion length 200 mm)

Vibration-resistant screw-in RTD temperature probes allow temperatures to be measured under pressure in engines and compressors as well as in plant engineering and shipbuilding.

The plug connection between the protection fitting and the connecting cable is locked to ensure contact. It has protection type IP65 when connected.

The measuring insert is a Pt100 temperature sensor according to DIN EN 60751:2009 / IEC 60751:2008, class B in two-wire circuit as standard. Other versions with Pt500 or Pt1000 are also possible.

The connection can be carried out in a two-wire or four-wire circuit as required.

Basic types 902044/25 to 902044/29 are available as versions with transmitters (output 4 to 20 mA).



Technical data

Connection	Basic types 902044/15, 902044/20, 902044/25, 902044/28, and 902044/80: DIN EN 175301-803 plug connectors, Pg9 Basic types 902044/16, 902044/21, 902044/26, 902044/29, and 902044/81: DIN EN 175301-803 plug connectors, Pg11 Max. conductor cross section 1.5 mm ² , IP65, ambient temperature -40 to +125 °C For versions with transmitters: ambient temperature -40 to +85 °C
Process connection	Thread, stainless steel 1.4301/1.4571
Protection tube	Stainless steel 1.4571, Ø 8 mm, Ø 6 mm stepped down to Ø 3.5 mm, Max. pressure load 50 bar at 200 °C (basic types 902044/20 and 902044/21)
Measuring insert	Pt100 temperature sensor, DIN EN 60751:2009 / IEC 60751:2008, class B, A, or AA in two-wire or four-wire circuit, exchangeable. Shorter fitting lengths in connection with unfavorable fitting conditions (heat conduction error) can result in an exceedance of the tolerance class. The measuring insert is not exchangeable for versions equipped with transmitters.
Protection type	IP65 when connected
Response times	Basic types 902044/15 and 902044/16: t _{0.5} = < 2 s, t _{0.9} = < 4 s, in water with 0.2 m/s, Ø 6 mm stepped down to Ø 3.5 mm Basic types 902044/20 and 902044/21: t _{0.5} = 15 s, t _{0.9} = 45 s, in water with 0.2 m/s, Ø 8 mm Basic types 902044/25 to 902044/29: t _{0.5} = < 2 s, t _{0.9} = < 4 s, in water with 0.2 m/s, Ø 6 mm stepped down to Ø 3.5 mm Basic types 902044/80 and 902044/81: t _{0.5} = 5 s, t _{0.9} = 12 s, in water with 0.2 m/s, Ø 8 mm
Vibration resistance	DNV GL, class B
Approvals	Basic type 902044/20 and 902044/21 DNV GL Class Guideline CG-0339, for details see certificate no. TAA00002RV
Accessories	Thermowell, data sheet 902440

Approvals and approval marks



JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6733 Myers Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Technical data

Transmitters	Input	
	Measurement input	Pt100, Pt500, or Pt1000 according to DIN EN 60751:2009 / IEC 60751:2008
	Measuring range limits	-50 to +260 °C
	Measuring span	25 to 310 K (also see zero offset)
	Zero offset	For measuring spans < 75 K, fixed zero adjustment: -40 °C, -20 °C, 0 °C, 20 °C, and 40 °C
	Data sheet 707030, page 7/10	For measuring spans ≥ 75 K: ±50 °C
	Sensor current	≤ 0.5 mA
Sampling rate	Permanent measurement due to analog signal path	
Measuring circuit monitoring		
Underrange	Dropping to ≤ 3.6 mA	
Overrange	Increasing to + 22 mA to < 28 mA (typically 24 mA)	
Probe short circuit	≤ 3.6 mA	
Probe and line break	Positive: + 22 mA to < 28 mA (typically 24 mA)	
Output		Only with the basic types 902044/25 to 902044/29
Output signal		Load-independent direct current 4 to 20 mA
Transmission behavior		Temperature-linear
Transmission accuracy		≤ ±0.1 %
Attenuation of the residual ripple of a voltage supply of 24 V, amplitude 10 V at 50 Hz, burden 470 Ω at load of 10 MΩ		40 dB
Burden (Rb)		$R_b = (U_b - 7.5 \text{ V}) \div 22 \text{ mA}$
Burden influence		≤ ±0.02% per 100 Ω ^a
Setting time for temperature changes		≤ 10 ms
Calibration conditions		DC 24 V at approx. 22 °C
Calibration accuracy		≤ ±0.2% ^{a, b} or ≤ ±0.2 K
Overall accuracy, sensor/calibration		±0.4 K (typically) at 20 °C and DC 24 V voltage supply
Voltage supply		
Voltage supply (U _b)		DC 7.5 to 30 V SELV
Requirement		The device must be equipped with an electrical circuit that meets the requirements of DIN EN 61010-1 with regard to "Limited-energy circuits".
Reverse voltage protection		Yes
Voltage supply influence		≤ ±0.01% per V deviation from DC 24 V ^a
Environmental influences		
Operating temperature range		-40 to +85 °C
Storage temperature range		-40 to +100 °C
Temperature influence		≤ ±0.01% per K deviation from 22 °C ^a
Resistance to climatic conditions similar to DIN EN 60654 class D1		Relative humidity ≤ 95% annual average, no condensation
Electromagnetic compatibility (EMC)		EN 61326
Interference emission		Class B - households or small businesses -
Interference immunity		Industrial requirement

^a All specifications refer to the measuring range end value of 20 mA.

^b The higher value is valid.

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk


JUMO Process Control, Inc.
 6733 Myers Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Approvals and approval marks

Approval mark	Test facility	Certificates/certification numbers	Inspection basis	Valid for
DNV GL	DNV GL	TAA00002RV	Class Guideline DNVGL-CG-0339	Basic type 902044/20 ... Basic type 902044/21 ...
SIL QUALIFIED	-	-	-	Extra codes 658 and 659 in conjunction with declaration of manufacturer
PL QUALIFIED	-	-	-	

Connection diagram

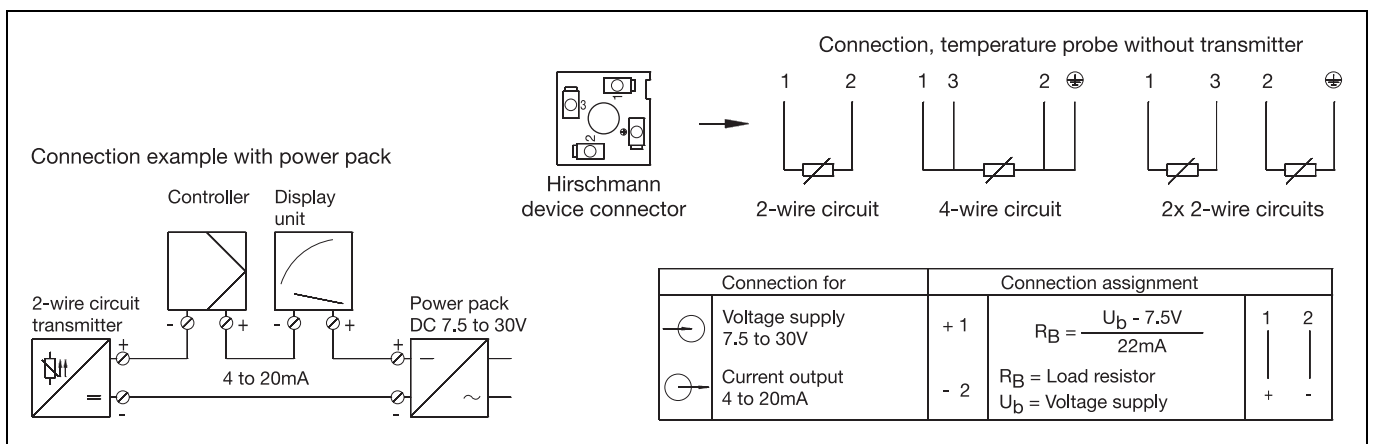


JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk


JUMO Process Control, Inc.
 6733 Myers Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com




Dimensions

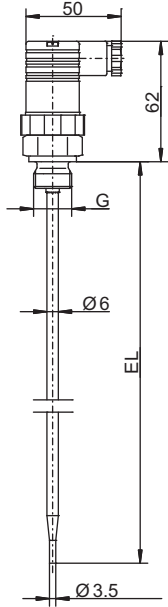


Basic type 902044/15
Basic type 902044/16

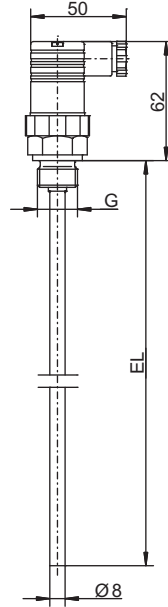


Basic type 902044/20
Basic type 902044/21

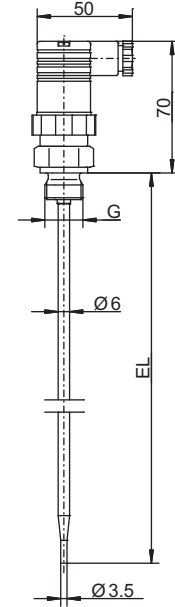

Basic type 902044/25
Basic type 902044/26

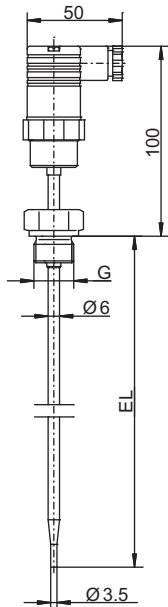

Basic type 902044/28
Basic type 902044/29

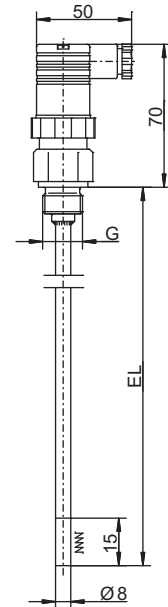

Basic type 902044/80
Basic type 902044/81

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6733 Myers Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com




Order details

(1) Basic type

902044/15 Screw-in RTD temperature probe with junction box Pg9 and stepped down protection tube according to DIN EN 175301-803 (DIN 43650)

902044/16 Screw-in RTD temperature probe with junction box Pg11 and stepped down protection tube according to DIN EN 175301-803 (DIN 43650)

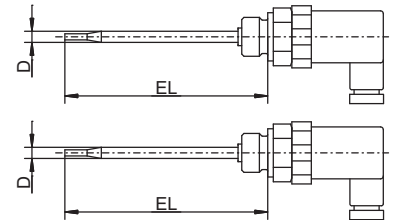

(2) Operating temperature in °C

x x 380 -50 to +200 °C

(3) Measuring insert

x x 1003 1× Pt100 in two-wire circuit (standard)

x x 1011 1× Pt100 in four-wire circuit

(4) Tolerance class according to DIN EN 60751:2009 / IEC 60751:2008

x x 1 Class B (standard)

x x 2 Class A

(5) Protection tube diameter D in mm

x x 6 Ø 6 mm, stepped down to Ø 3.5 mm

(6) Insertion length EL in mm (50 to 800 mm)

x x 50 50 mm

x x 100 100 mm

x x 150 150 mm

x x 200 200 mm

x x 250 250 mm

x x . . . Specification in plain text (50 mm increments)

(7) Process connection

x x 102 Screw connection G 1/4

x x 103 Screw connection G 3/8

x x 104 Screw connection G 1/2

x x 126 Screw connection M18 × 1.5

x x 128 Screw connection M20 × 1.5

x x 144 Screw connection 1/2-14 NPT

(8) Protection tube material

x x 26 Stainless steel 1.4571

(9) Extra codes

x x 000 None

x x 658 SIL and PL compatible (only in conjunction with JUMO SIL-certified safety temperature limiters and temperature monitors according to data sheet 701150)

x x 659 SIL and PL compatible (only in conjunction with JUMO dTRANS T06 temperature transmitter according to data sheet 707071)

Order code	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)
Order example	902044/15	380	1003	1	6	100	104	26	000

Note:

Version with machine connector M12 × 1, data sheets 902040 and 902815

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6733 Myers Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com




Order details

(1) Basic type

902044/20 Screw-in RTD temperature probe
 with junction box Pg9
 according to DIN EN 175301-803 (DIN 43650)

902044/21 Screw-in RTD temperature probe
 with junction box Pg11
 according to DIN EN 175301-803 (DIN 43650)

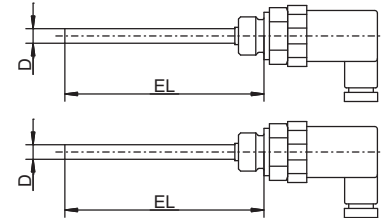

(2) Operating temperature in °C

x x 380 -50 to +200 °C

(3) Measuring insert

x x 1003 1× Pt100 in two-wire circuit (standard)

x x 1011 1× Pt100 in four-wire circuit

x x 2003 2× Pt100 in two-wire circuit

(4) Tolerance class according to DIN EN 60751:2009 / IEC 60751:2008

x x 1 Class B (standard)

x x 2 Class A

x x 3 Class AA

(5) Protection tube diameter D in mm

x x 8 Ø 8 mm

(6) Insertion length EL in mm (50 to 800 mm)

x x 50 50 mm

x x 100 100 mm

x x 150 150 mm

x x 200 200 mm

x x 250 250 mm (no DNV GL approval)

x x . . . Specification in plain text (50 mm increments)

(7) Process connection

x x 102 Screw connection G 1/4

x x 103 Screw connection G 3/8

x x 104 Screw connection G 1/2

x x 126 Screw connection M18 × 1.5

x x 128 Screw connection M20 × 1.5

x x 144 Screw connection 1/2-14 NPT

(8) Protection tube material

x x 26 Stainless steel 1.4571

(9) Extra codes

x x 000 None

x x 062 DNV GL approval (max. EL = 200 mm)

x x 658 SIL and PL compatible (only in conjunction with JUMO SIL-certified safety temperature limiters and temperature monitors according to data sheet 701150)

x x 659 SIL and PL compatible (only in conjunction with JUMO dTRANS T06 temperature transmitter according to data sheet 707071)

	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)								
Order code	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	/	<input type="text"/>						
Order example	902044/20	-	380	-	1003	-	1	-	8	-	100	-	104	-	26	/	000

Note:

Version with machine connector M12 × 1, data sheets 902040 and 902815

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk


JUMO Process Control, Inc.
 6733 Myers Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Order details

(1) Basic type

	902044/25	Screw-in RTD temperature probe with analog transmitter and junction box Pg9 according to DIN EN 175301-803 (DIN 43650)
	902044/26	Screw-in RTD temperature probe with analog transmitter and junction box Pg11 according to DIN EN 175301-803 (DIN 43650)
	902044/28	Screw-in RTD temperature probe with analog transmitter and junction box Pg9 according to DIN EN 175301-803 (DIN 43650) (neck tube design for higher temperatures)
	902044/29	Screw-in RTD temperature probe with analog transmitter and junction box Pg11 according to DIN EN 175301-803 (DIN 43650) (neck tube design for higher temperatures)

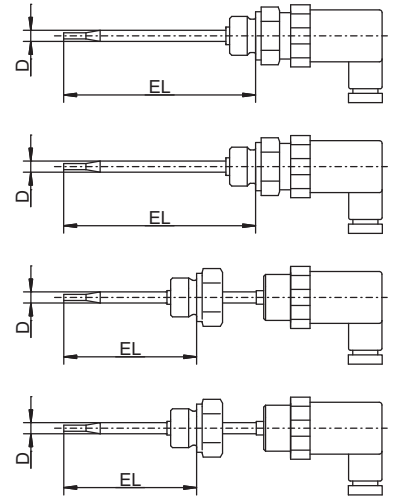

(2) Operating temperature in °C

x	x		370	-50 to +150 °C	
		x	x	386	-50 to +260 °C

(3) Measuring insert

x	x	x	x	1003	1× Pt100 in two-wire circuit
---	---	---	---	------	------------------------------

(4) Tolerance class according to DIN EN 60751:2009 / IEC 60751:2008

x	x	x	x	1	Class B (standard)
x	x	x	x	2	Class A

(5) Protection tube diameter D in mm

x	x	x	x	6	Ø 6 mm, stepped down to Ø 3.5 mm
---	---	---	---	---	----------------------------------

(6) Insertion length EL in mm (50 to 800 mm)

x	x	x	x	50	50 mm
x	x	x	x	100	100 mm
x	x	x	x	150	150 mm
x	x	x	x	200	200 mm
x	x	x	x	250	250 mm
x	x	x	x	...	Specification in plain text (50 mm increments)

(7) Process connection

x	x	x	x	102	Screw connection G 1/4
x	x	x	x	103	Screw connection G 3/8
x	x	x	x	104	Screw connection G 1/2
x	x	x	x	126	Screw connection M18 × 1.5
x	x	x	x	128	Screw connection M20 × 1.5
x	x	x	x	144	Screw connection 1/2-14 NPT

(8) Protection tube material

x	x	x	x	26	Stainless steel 1.4571
---	---	---	---	----	------------------------

(9) Extra codes

x	x	x	x	000	None
---	---	---	---	-----	------

Order code	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)								
Order example	902044/25	-	370	-	1003	-	1	-	6	-	100	-	104	-	26	/	000

Note:

Version with machine connector M12 × 1, data sheets 902040 and 902815

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO Instrument Co. Ltd.
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk


JUMO Process Control, Inc.
 6733 Myers Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Order details

(1) Basic type

902044/80	Screw-in RTD temperature probe with junction box Pg9 according to DIN EN 175301-803 (DIN 43650) and flexible screw connection
902044/81	Screw-in RTD temperature probe with junction box Pg11 according to DIN EN 175301-803 (DIN 43650) and flexible screw connection

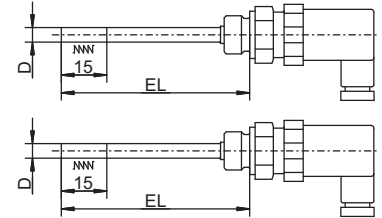

(2) Operating temperature in °C

x x 380 -50 to +200 °C

(3) Measuring insert

x x 1003 1× Pt100 in two-wire circuit (standard)
 x x 1011 1× Pt100 in four-wire circuit
 x x 2003 2× Pt100 in two-wire circuit

(4) Tolerance class according to DIN EN 60751:2009 / IEC 60751:2008

x x 1 Class B (standard)
 x x 2 Class A

(5) Protection tube diameter D in mm

x x 8 Ø 8 mm

(6) Insertion length EL in mm (50 to 800 mm)

x x 50 50 mm
 x x 100 100 mm
 x x 150 150 mm
 x x 200 200 mm
 x x 250 250 mm
 x x . . . Specification in plain text (50 mm increments)

(7) Process connection

x x 104 Screw connection G 1/2

(8) Protection tube material

x x 26 Stainless steel 1.4571

(9) Extra codes

x x 000 None
 x x 658 SIL and PL compatible (only in conjunction with JUMO SIL-certified safety temperature limiters and temperature monitors according to data sheet 701150)
 x x 659 SIL and PL compatible (only in conjunction with JUMO dTRANS T06 temperature transmitter according to data sheet 707071)

Order code	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)
Order example	902044/80	- 380	- 1003	- 1	- 8	- 100	- 104	- 26	/ 000

Stock versions

Order code	Part no.
902044/15-380-1003-1-6-100-104-26/000	00600899
902044/20-380-1003-1-8-50-104-26/000	00365259
902044/20-380-1003-1-8-100-104-26/000	00368414
902044/20-380-1003-1-8-150-104-26/000	00368416